

## Losán Stone Form





# TRADITIONAL VALUES


With classic good looks and durability,  
only real stone veneer can enhance and enrich  
the traditional home with authority nothing  
else can do it.





# AN ANSWER TO EVERY NEED


Here, every need of customers is answered with a wide range of products in standard sizes while also offering the possibility and capability to adapt each product to the formats and special needs of each individual project.

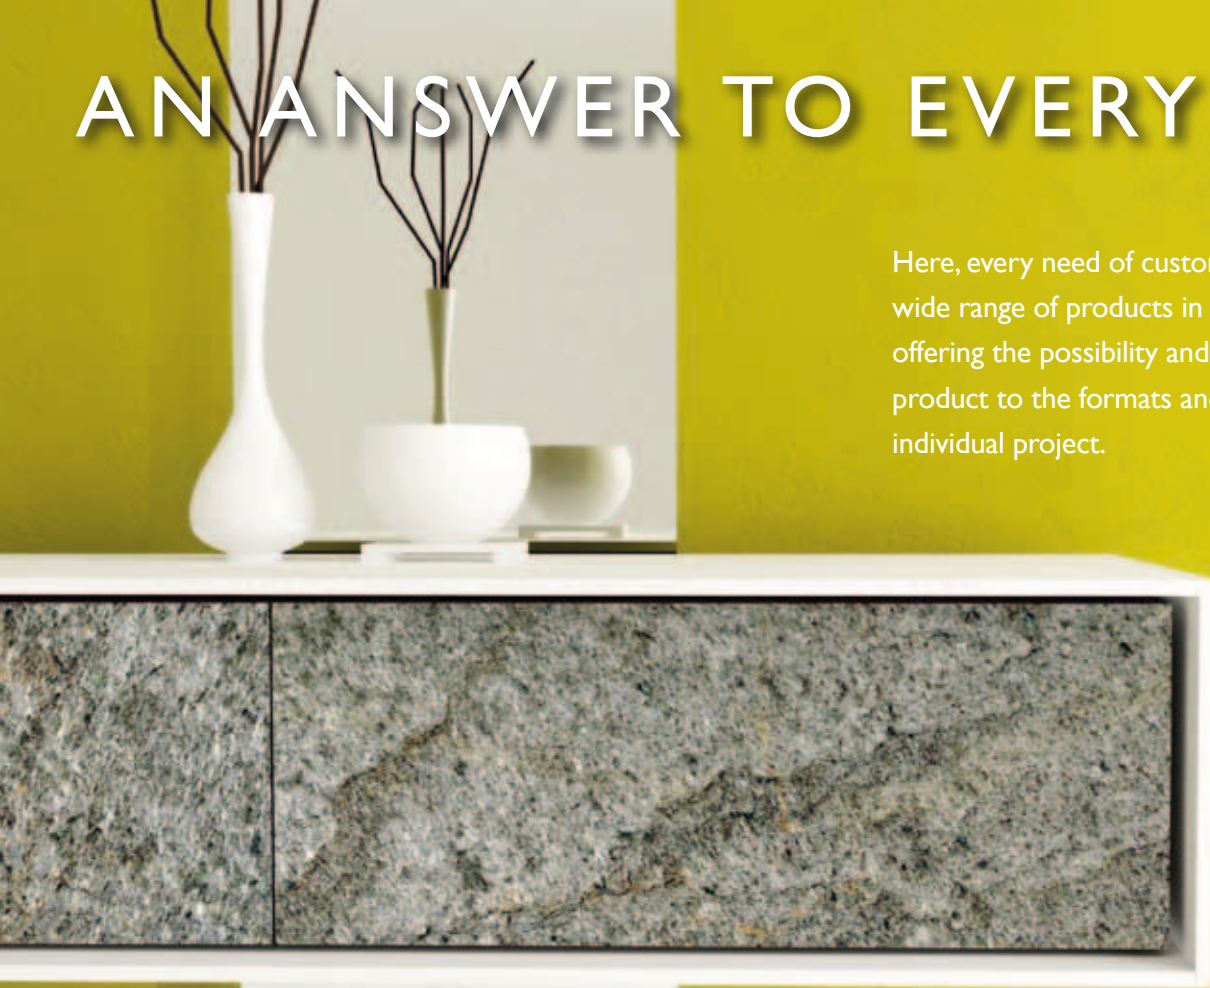



# FOR BEAUTIFUL LIVING

We are proud of the unparalleled selection of real stone veneer that we offer. You will have many choices, whatever your style.

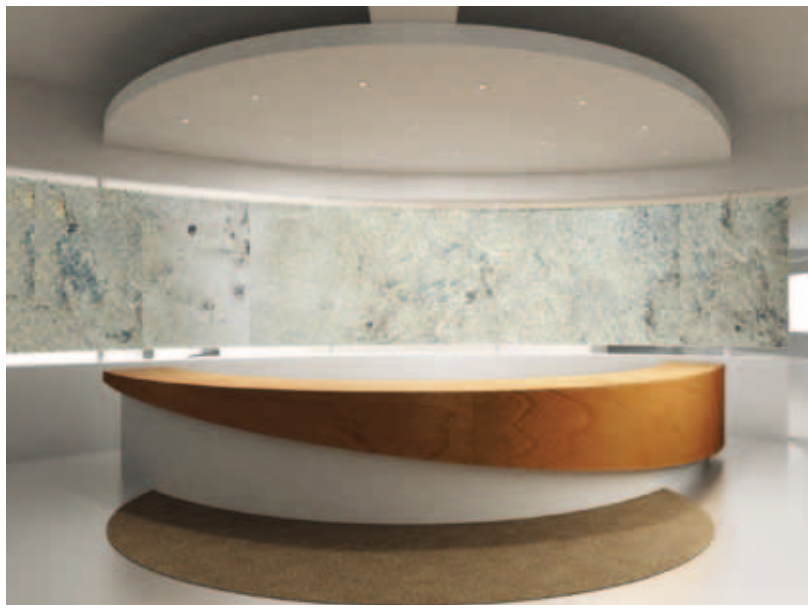

# STONE VENEER




Natural Stone Veneer is a flexible veneer made of thin layer of various types of real stone which can be applied to many different surfaces indoors or outdoors, like concrete, ceramic, wood, metal, plywood, fiberglass, backer board, tile, dry wall, painted surfaces, MDF, door skins, cabinetry as well as many other substrates.

Natural Stone Veneer has been tested as a covering veneer in many different environments, proving to be a superb material where a lightweight real stone finish is desired & heavy solid stone may not be practical. Huge range of colours available in the natural stone veneer adds to its versatile utility. Because it's made from thin layers of real stone Natural Stone Veneer is a time and labour saving product that does not require all of the standard masonry tools and methods.

Natural Stone Veneer is not recommended for flooring & kitchen countertop applications. You may use in countertops by putting glass, acrylic or such other transparent materials.



**Losán** Benelux

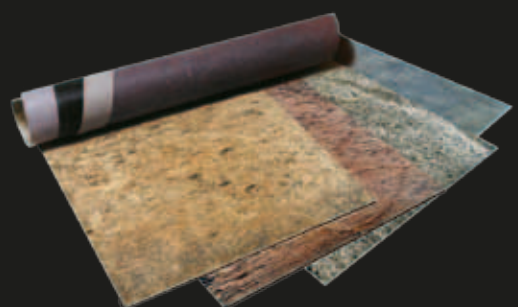



MATERIAL AVAILABLE

---



Santiago



Santander



Curtis



Murcia



Almeria




Lanzarote



Zaragoza



Sevilla

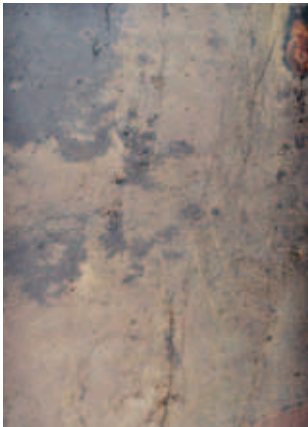

Salamanca



Pamplona



Vigo



Bilbao



Granada



Burgos



Leon



Soria

# INSTALLATION

---

## Layout & Patterns

Preparation of the area to be covered and the layout of the Natural Stone Veneer sheets is the same as for natural Stone or tile. Time spent preparing the work area will pay off immensely. A preliminary dry fit of Natural Stone Veneer allows for arrangements of orientation of individual sheets, patterns, textures and colours before final placement. It is recommended that each sheet be dry fit exactly where it will be placed on horizontal or vertical surfaces. Numbering the sheets to track relocation before cutting and trimming is recommended and will save time.

## Cutting

Cutting straight lines and curves is best done using long nosed tin snips. Natural Stone Veneer can also be cut with a metal shear, wet saw or table saw with carbide blade.

## Sealers

It is best to pre-seal Natural Stone Veneer sheets prior to installation. This protects and seals the face from adhesives and grout during installation and handling. Natural Stone Veneer can be sealed with the same sealers used for slate, stone tiles and wood. There are many sealers in the market with various recommended applications.

## Adhesives

Know your adhesives: By understanding the specifics of the adhesive, a good deal of time and cost can be saved. All adhesives should be tested prior to any installation including consideration of moisture and temperature in the planned environment. If the application is outdoors, consideration to thermal expansion needs to be taken into account. Since Natural Stone Veneer is a veneer it must expand and contract with the substrate or delamination may occur. Where adhesive primers are recommended the bond should be tested by the installer before final installation.

## Recommended Adhesives

- Heavy duty construction adhesive
- Solvent free FRP adhesive
- Premixed grout and tile adhesive
- Acrylic copolymer based tile adhesive
- Polyurethane wood glues and PU construction grade adhesives
- Wood, parquet and outdoor carpet adhesives
- Thick latex or acrylic latex type tile adhesives. Use only where air drying can take place.  
Not recommended for exterior applications
- Epoxy or Silicone (with primer only)
- Construction grade multi-purpose adhesives or Polyester resin with filler
- Double-sided foam adhesive (peel & stick)

The back of Natural Stone Veneer may require a filler type adhesive for some applications. For wet environments epoxies, polyester resin and water proof adhesives are the best candidate. Contact adhesives are not recommended due to the uneven backing of Natural Stone Veneer. Do not use where the substrate is a moisture barrier when using non-catalyzing (water vapour type) cure adhesives. Adhesives may not adhere properly if applied between non-porous materials.

## Hand rollers

A hand roller is recommended to remove air between the Natural Stone Veneer and substrate. To properly roll out trapped air, start in the middle of a sheet while firmly rolling to the edge. Do not press too hard while rolling as this may cause back-filled areas to push adhesive out and leave an air void. By proper pre-back-filling and using good rolling techniques a solid, hard surface will be achieved.

## Trowels

For best results of adhesive to substrate, a notched trowel is recommended. Use a straight trowel for back-filling of voids. Any bumps in the back surface should be sanded flat prior to back-filling. The back of Natural Stone Veneer may require a filler type adhesive to backfill or level out voids of the natural stone. It is always best to back-fill of back-butter voids or depressions in the material before application to a substrate.



## Tiling, Grouting & Jointing

Natural Stone Veneer can be used to create a tiled effect by leaving a grout joint between cut pieces. Sheets may also be butt-jointed for the look of a smaller seam. Due to the thin nature of Natural Stone Veneer a 6 to 12 mm grout joint will produce better results. Tests show the use of water based epoxy and acrylic premixed grout work well to fill between the cut veneers. During the sponge-off process, the epoxy will seal the surface of the Natural Stone Veneer as well. These grouts are also available in several colors to match the existing decor. If desired a deeper grout joint can be achieved by removing material just under the grout joint area with a scrapper tool. Modified grout and caulking grout can also be used.

## Substrate

In some indoor and most outdoor applications expansion and contraction must be equal to prevent delimitation. A flexible adhesive may be considered in this case. Concrete and masonry substrates must be at least 28 days old. Hydrostatic pressure conditions and vapour transmission cannot exceed 1,46 kg per 100 m<sup>2</sup> per 24 hours using a calcium chloride test, and retained moisture should be less than 2,5 %.

## Composition & Variations

Natural Stone Veneer is laminated to a fiberglass and polyester resin substrate. Since Natural Stone Veneer is a natural Stone Veneer, colour and texture variances are not defects within the material but are inherent to it and part of the natural beauty of quarried materials. Natural Stone Veneer cannot be guaranteed to match lot-by-lot, so it is recommended that orders take into account future maintenance or re-fit possibilities.

## UV & Temperature

The stone surface of Natural Stone Veneer, like most stone elements, acts as a UV inhibitor and will resist high sun conditions for years. When adhered to a substrate, Natural Stone Veneer will handle thermal contraction and or expansion of most standard construction materials. Natural Stone Veneer will handle both high temperatures and freezing without cracking.



|               |   |
|---------------|---|
| Size          | 1200 x 600 mm (available on request in selected slates).  |
| Thickness     | 0,5 to 2 mm varies with colours.  |
| Texture       | Varies with selection of slate.   |
| Colour        | Being natural in origin, variation in colour, pattern & texture is common.<br>Majority quartzite slates being metallic multicoloured in origin, colour variation across different panels is common. |
| Weight        | Approx, 1,5 kg/sheet of 1200 x 600 mm.  |
| Packing       | Each sheet individually wrapped with paper/ pp bag<br>20 such sheets in 5 ply corrugated master box outer.  |
| Outer pack    | Dimension: 1270 x 635 x 5 cm = 10 sheets of 1200 x 600 mm = 15 kgs.   |
| Moisture      | Stone & FRP back are both stable in water & moisture.<br>It can be easily used to cover moist & weather affected areas.   |
| Temperature   | Veneer is stable from 25 to 80 degrees centigrade.<br>The glue selection has to be according to the temperature exposure.   |
| Heat Transfer | Veneer does not enable any sort of heat transfer on either sided.   |
| Pressure      | Veneer is stable up to normal pressure, it can resist high pressure provided it is not in impact form which can damage its surface.   |
| Flexibility   | Veneer is a flexible bendable material & can bend up to 6" radius.  |
| Expandability | Veneer does not expand or contract above 1 mm. In total, a slight 1 mm groove in application will be helpful to take care of this.  |
| Surface       | Veneer is also offered in various surface protection coatings like glossy, matt, environment protective antistatic coating, etc...  |
| Protection    | It is recommended to coat the surface of all external applications.   |



**Losán Benelux**

Phileas Foggstraat 112  
NL-7825 AM Emmen  
The Netherlands

Tel. +31 591 666 888  
Fax +31 591 666 899  
E-mail: [info@losanbenelux.nl](mailto:info@losanbenelux.nl)